

**PB**<sup>®</sup>  
FINESTRE

# IRIS

PVC

The attention to design and the variety of styles and colors offered.

## PROFILE DETAILS


6 CHAMBER FRAMES  
6 CHAMBER SASH  
Glass thickness up to 53mm  
Profile depth 86mm  
Central node 160mm



[WWW.PBFINESTRE.IT](http://WWW.PBFINESTRE.IT)


### HORIZONTAL SECTION

Central Node

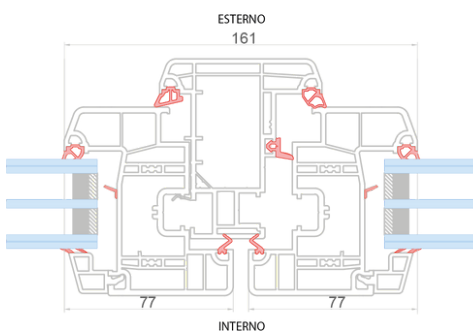


### VERTICAL SECTION

Frame 72

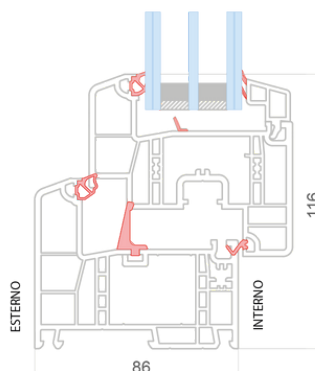

### FRAME VARIANT

Frame Restoration 64/40



## FEATURES



### RECYCLED PVC

Our windows are crafted using recycled high-quality PVC, a material that is biodegradable, recyclable, non-toxic, fire-resistant, and eco-friendly. It's a modern, recycled material that ensures elevated standards of strength, lightweightness, and thermal-acoustic performance.



### TOULON HANDLE

The Hoppe Toulon handle is crafted with prestigious materials from certified companies. It is a high-level, functional, and aesthetically pleasing handle with an excellent quality-to-price ratio.



### ENERGY GLASS INSULATING UNIT®

The insulating glass unit features a black warm-edge spacer and Planitherm Infinity coating by Saint Gobain, offering low-emissivity and selectivity (Ug: 1.0 W/m<sup>2</sup>K for single glazing and Ug: 0.6 W/m<sup>2</sup>K for double glazing).



### PERFECT WELDING

The welding technology completely eliminates the welding bead from the corner, ensuring an optimal result both aesthetically and with perfectly aligned joints.




### HARDWARE

Standard features include three-dimensional adjustable hinges with a sash/tilt mechanism; silver-colored PVC hinge covers. A lever rod facilitates the lower and upper closure of the passive door. Upon request, concealed hardware can be integrated. The Cremonese lock, made of steel, has 2 anti-burglary locking points.



### MICROVENTILATION

Our design philosophy revolves around using energy efficiently, thereby contributing to the reduction of consumption and minimizing environmental impact. Our windows, resistant to water, air, and external elements, have earned the highest certifications for sound insulation and energy efficiency.



### WIDE RANGE OF COLORS

The base body in regenerated PVC, available in various colors, allows for coordination with 42 decorative films from the REHAU color palette to achieve the desired project aesthetics.



### WARRANTIES

Thanks to the outstanding performance and reliability of our windows, we have garnered prestigious certifications from international institutes. We offer a 10-year warranty for white PVC profiles, while coated profiles are guaranteed for 5 years.



### SECURITY

All our fixtures come with robust capabilities to impede and thwart burglary attempts. Certified hardware is standard, and upon request, this resistance can be elevated to higher security levels, up to the maximum RC2 security grade. Moreover, the integrated electric contact anti-theft feature is compatible with all home automation systems.

## TECHNICAL PERFORMANCE

### Air Permeability Resistance Class\*

(according to the UNI EN 1026 – 2001 test standard and the UNI EN 12207 – 2000 classification standard)

### Class 4

Indicates how much the fixture is permeable to air passing through it at a pressure of 600 Pa, which corresponds to a wind speed of 115 km/h.

### Water Tightness Resistance Class \*

(according to the UNI EN 1027 – 2001 test standard and the UNI EN 12208 – 2000 classification standard)

### Class 9A for windows, Class 5A for frenchdoor

Indicates the fixture's ability not to be penetrated by water under a pressure of 750 Pascal.

### Wind Load Resistance Class\*

(according to the UNI EN 12211 – 2001 test standard and the UNI EN 12210 – 2000 classification standard)

- Class C2
- Class B3

Indicates the fixture's ability to resist the wind pressure at a specific speed.

### Acoustic Reduction Certification\*\*

Up to **48dB** or sections with a thickness of **53mm**  
(with glass 44.1 stadipl silence Planitherm Infinity +16 argon gas +33.1 stadipl protect)

### Thermal Performance Certifications\*\*

Achievable Uw values: **0,75 W/m<sup>2</sup>K** in the version with a thickness of **53mm**  
Solar Factor:**G=0,35**

### Declaration of European Conformity



### CE Mark

Products conforming to the European standard EN 14351-1. All our windows are CE marked, according to the law, to ensure maximum peace of mind and security in your home.

\*as per certifications in our possession issued by the ROSENHEIM Institute

\*\* as per certifications issued by the GIORDANO Institute



Descriptions are not binding. The company reserves the right to make any necessary modifications. PB FINESTRE WINDOWS AND DOORS is a trademark owned by IWDI SRL a socio unico. All rights reserved.